



MODIFICATIONS :- ISSUE 'A' ORIGINAL.
 - ISSUE 'B' : 05-NOV-2004
 - ISSUE 'C' : 16-MAY-2005 (Approved on 16-MAY-2005.)

Rev.	Part No	Description	Materials	Qty	Spares
1	TLKS-6010-00-3030	TRANSMISSION UNIT	-	1	
2	7535-6010-0484	HUB	BS970-150M19XM	2	
3	1412-4745-0040	STRIPPER BOLT	ISO GRADE 12.9	16	

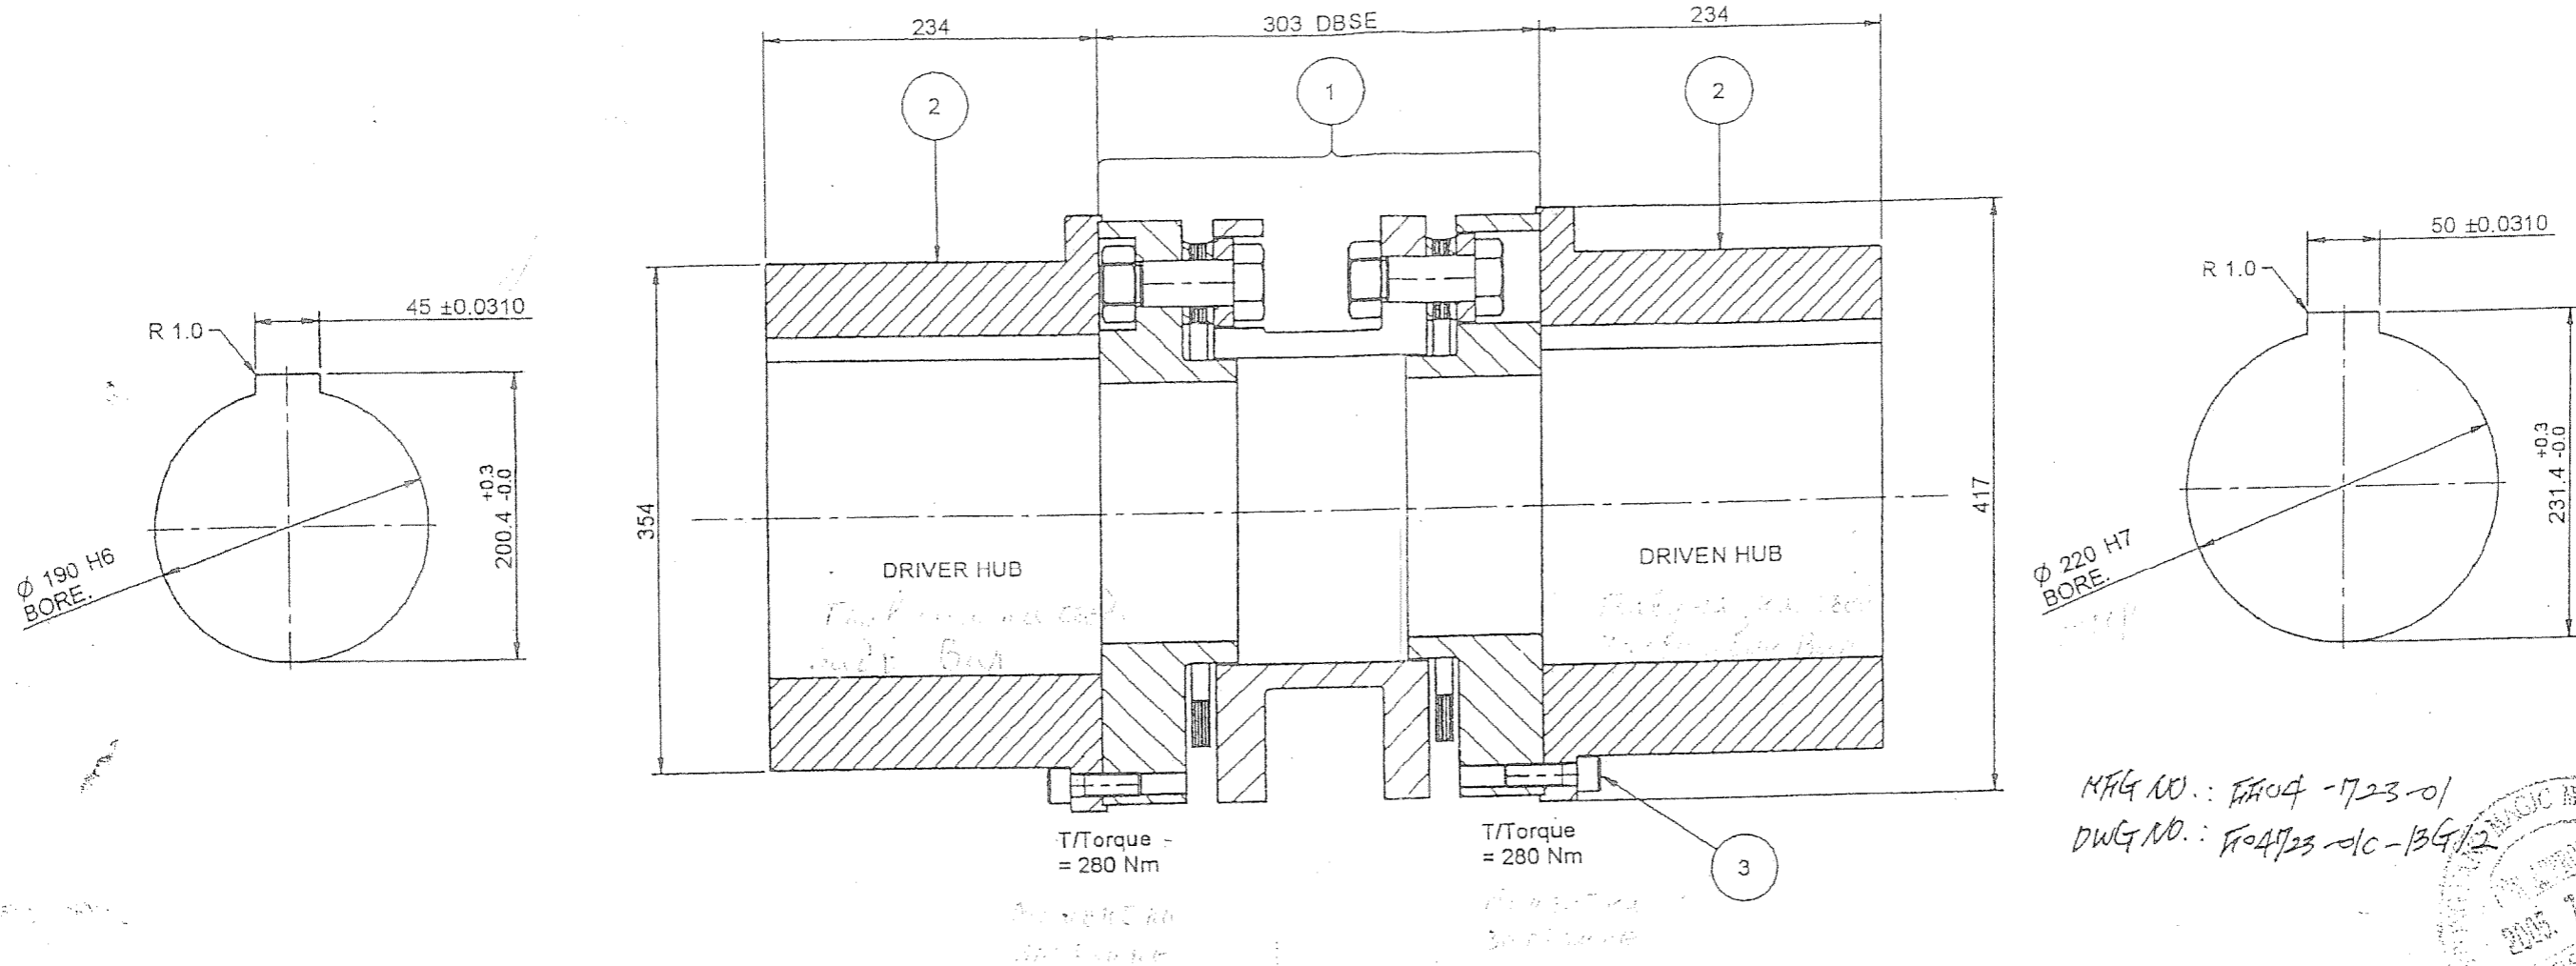

MFG NO. : FF04-1723-01
 DWG NO. : FF04/23-01-136/2



* DBSE : DISTANCE BETWEEN SHAFT ENDS.

GENERAL NOTES				COUPLING ASS'Y		COUPLING DUTY		METASTREAM		REFERENCE DATA:				
1. ID FAN				MASS	415.87 kg	APPLICATION FACTOR	2.08	CUSTOMER DATA		DRAWING LOCATION: KOREA				
				INERTIA	9.3180 kgm ²	POWER	2,850 KW			CUSTOMER	Tong Yang Magic Co., Ltd	DRAWN	DATE	CHK'D
				TORSIONAL STIFFNESS	9.405 MNm/rad	SPEED	985 rpm	P.O. No.	-	JBHwang	05NOV04	BKLee	MSJo	NONE
EQUIVALENT PARALLEL OFFSET : MAX ± 0.9694 mm				PEAK TORQUE	114.6 KNm	ARRANGEMENT OF METASTREAM COUPLING TYPE:		TLKS-6010-0177-3030						
ANGULAR RESTORING MOMENT : 1.730 KNm/deg				DRIVE BOLT TORQUE	1095 Nm	EQUIPMENT TYPE							DRAWING NUMBER	
MAX. ANGULAR OFFSET : MAX 1/3 deg				MAX. CONTINUOUS TORQUE		54.7 KNm	MODEL / SIZE		DRAWING NUMBER		SHEET	ISSUE		
AXIAL MISALIGNMENT		AXIAL FORCE : MAX 11.4 KN		SERIAL No.		EQUIPMENT TYPE		MC/TL0049					1 OF 1	C
		MAXIMUM AXIAL DISPLACEMENT : MAX ± 3.900 mm		END USER		EQUIPMENT TYPE		JohnCrane						
Copyright 2002 © Copyright and design right reserved. This drawing and the information contained in it is proprietary to John Crane Korea and may not be disseminated without prior written consent.				END USER LOCATION		BULGARIA		INSTALLED AT		FF04-723				